


Cariitti.

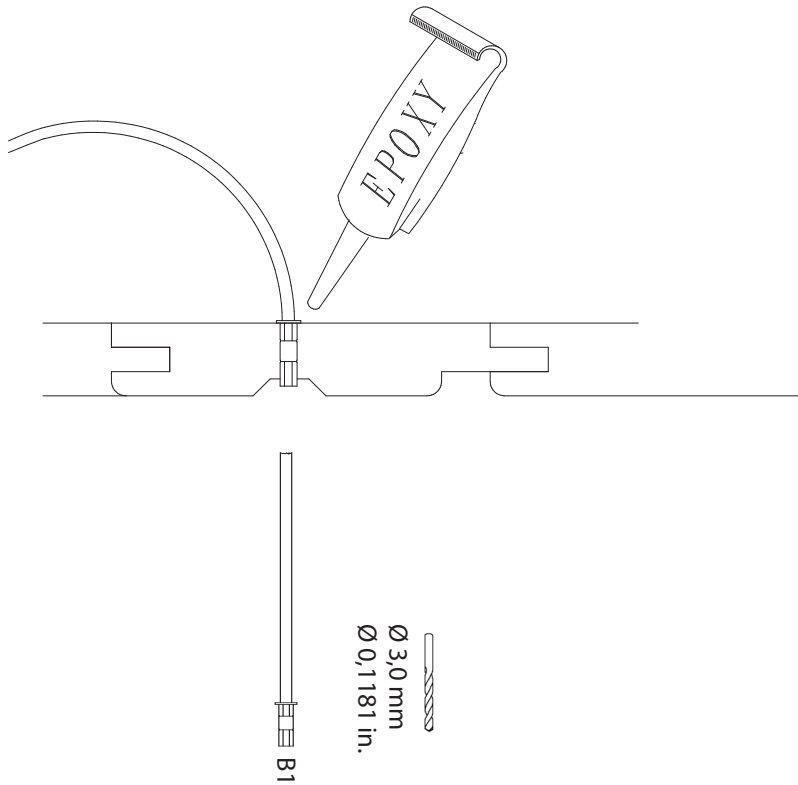

Name	Outside Ø in.	Max bend radius in.	Ferrule	Min-Max T _a °F
S-Flex 1	0,0866	0,3937	B1	-58 - +356

ENG The fibers may not be installed in less than +41 °F ambient. If the fibers are stored in cold place, allow them to warm up for at least 2 h before starting the installation.

Max bend radius

